

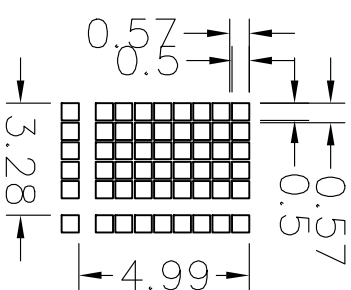
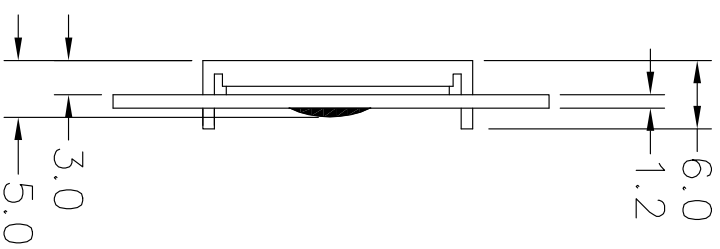


Customer approval :

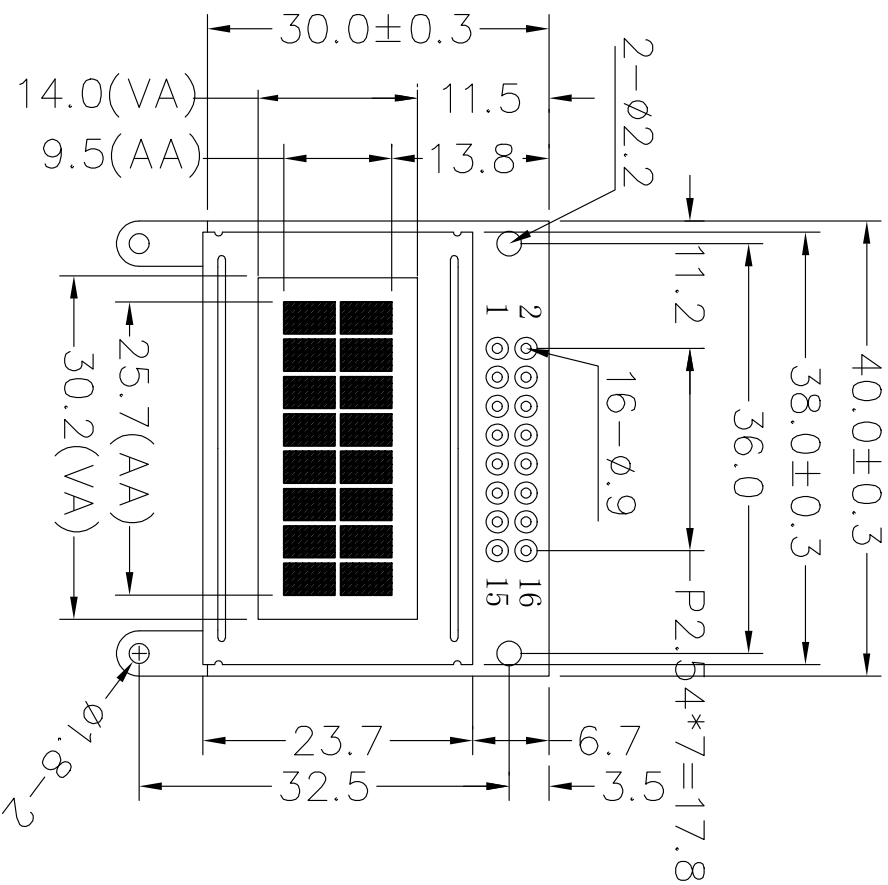

SPECIFICATION:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:3.2V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Positive/Transflective/ YG
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Control IC: SPLC780D1
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REVISION RECORD	REV
First issue	A0

TCC 深圳市三元晶科技有限公司
ShenZhen TCC Hi-Tech Co., Ltd.

DRAWING NO.	SYB0802BY10-5C10Y11	GENERAL TOL:	± 0.2
APPROVED BY		UNIT:	mm
CHECKED BY		DRAWING BY	KGD
		DATE	2011/3/9
		PAGE	1/1