

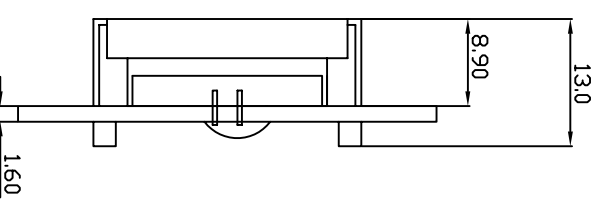


Customer approval :

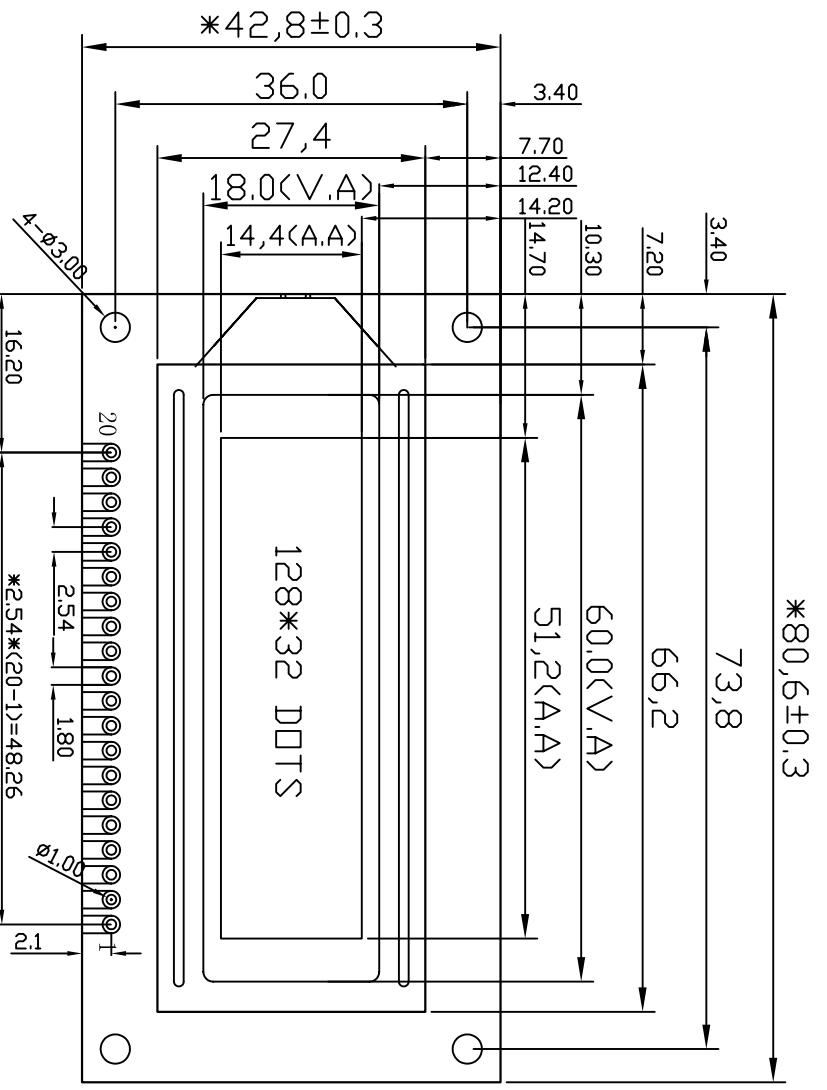

Specification:

- 1). Driving: Duty:1/32, Bias:1/6, VLCD:4.7V(Ref), VDD:5V
 - 2). Viewing Direction: 6 O'clock
 - 3). Display mode:STN Yellow-green Blue, FSIN
 - 4). Operating temp.: -20°C~70°C
- Storage temp.: -30°C~80°C

- 5). Controller IC: ST7920 , COB
- 6). Backlight: Bottom ,YG
- 7). Dimensions with mark "*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9 ~ 16	17	18	19	20
CONNECTION	VO	Vout	GND	VCC	NC	RS/CS	RW/SID	E/SCLK	DB0 ~ DB7	PSB	RST	BLK	BLA

REV	REVISION RECORD	DATE	MODEL NO.				GENERAL TOL: ±0.3		
A0	First Issue	12/10	SYBI2832BZKY30				PAGE:		
			APPROVED BY	CHECKED BY	DRAWING BY	PROJECTION			
						UNIT: mm			



深圳市三元晶科技有限公司
Shenzhen TCC LCD Hi-Tech Co., Ltd