Customer approval :

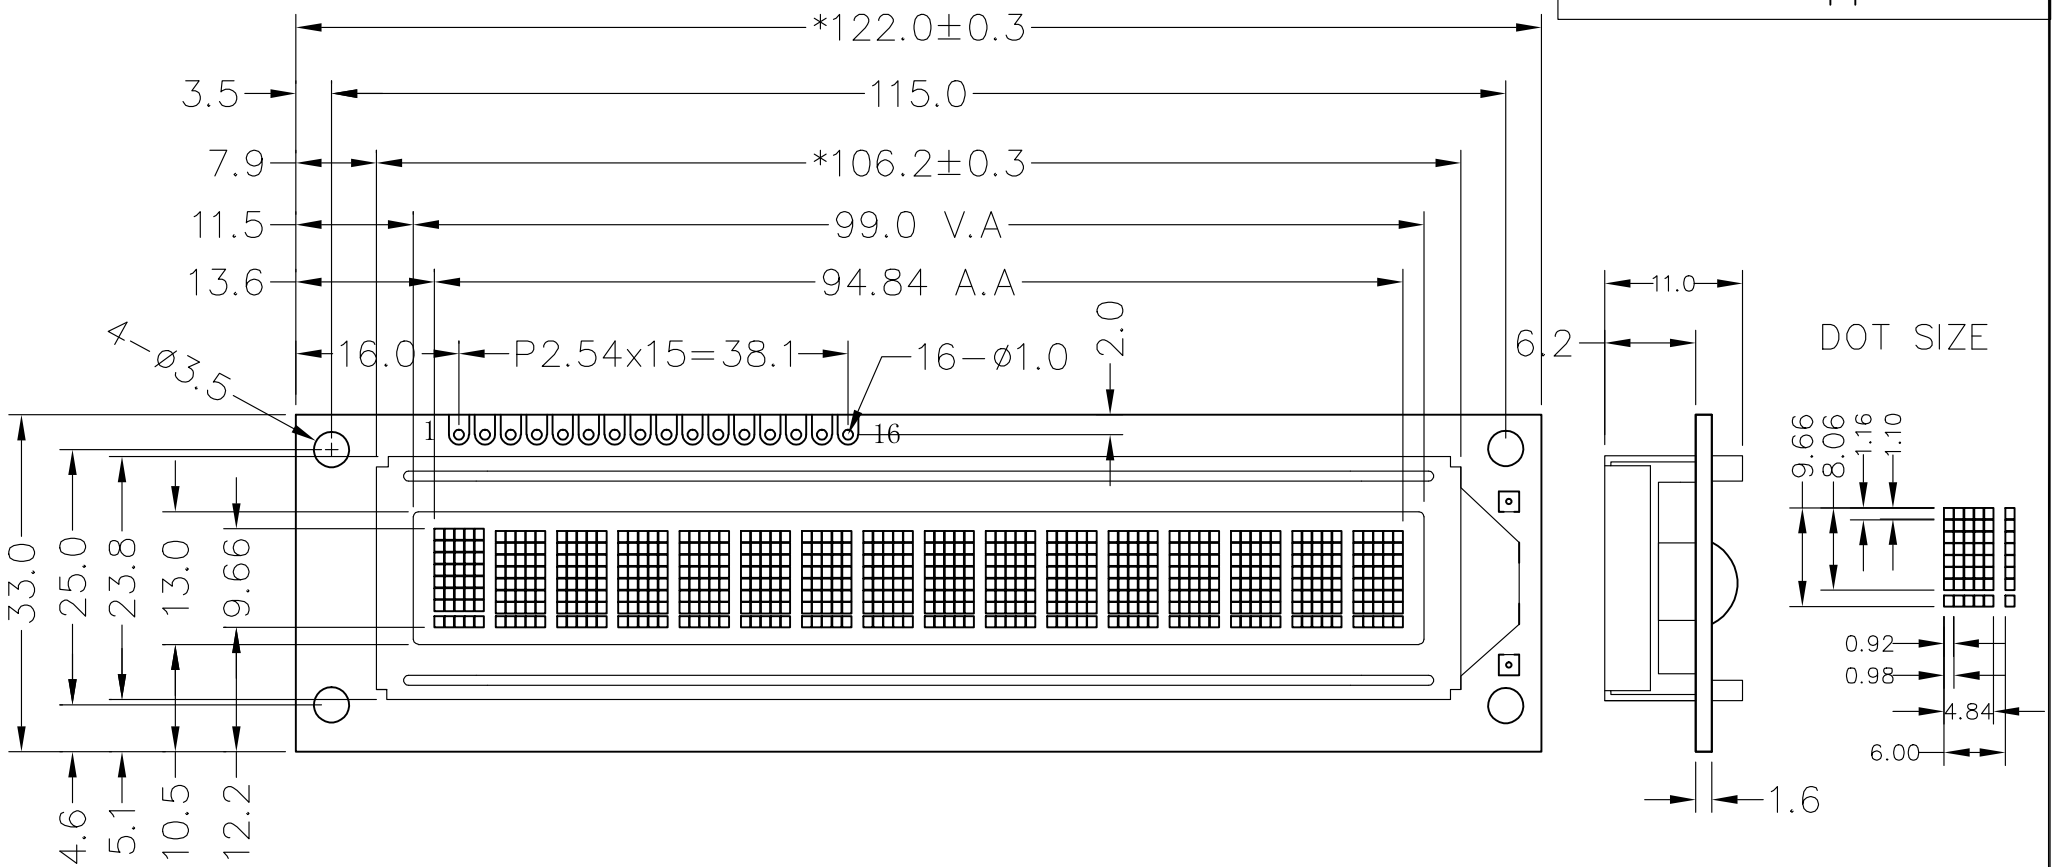

SPECIFICATION:

1). Driving: Duty: 1/16, Bias: 1/5, Vdd: 5.0V, Vlcd: 4.0V
2). VIEWING DIRECTION: 6 O'CLOCK
3). Display mode: STN/Y-G/Positive/**Transflective**
4). Operating temp.: 0°C~+50°C
5). Storage temp.: -10°C~+60°C
6). Control IC: SPLC780D1(Or Compatible)
7). BACKLIGHT: LED,Y-G
8). DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REVISION RECORD	REV
First issue	A0

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co,. Ltd

DRAWING NO.	SYB1601DV10-5C10YL3-B5NG		GENERAL TOL:	± 0.2
APPROVEDBY	CHECKED BY	DRAWING BY	UNIT: mm	PAGE
		YJQ 2010/9		1/1