
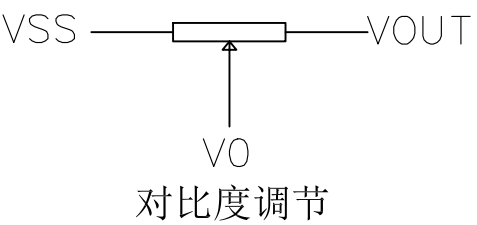



Customer approval :

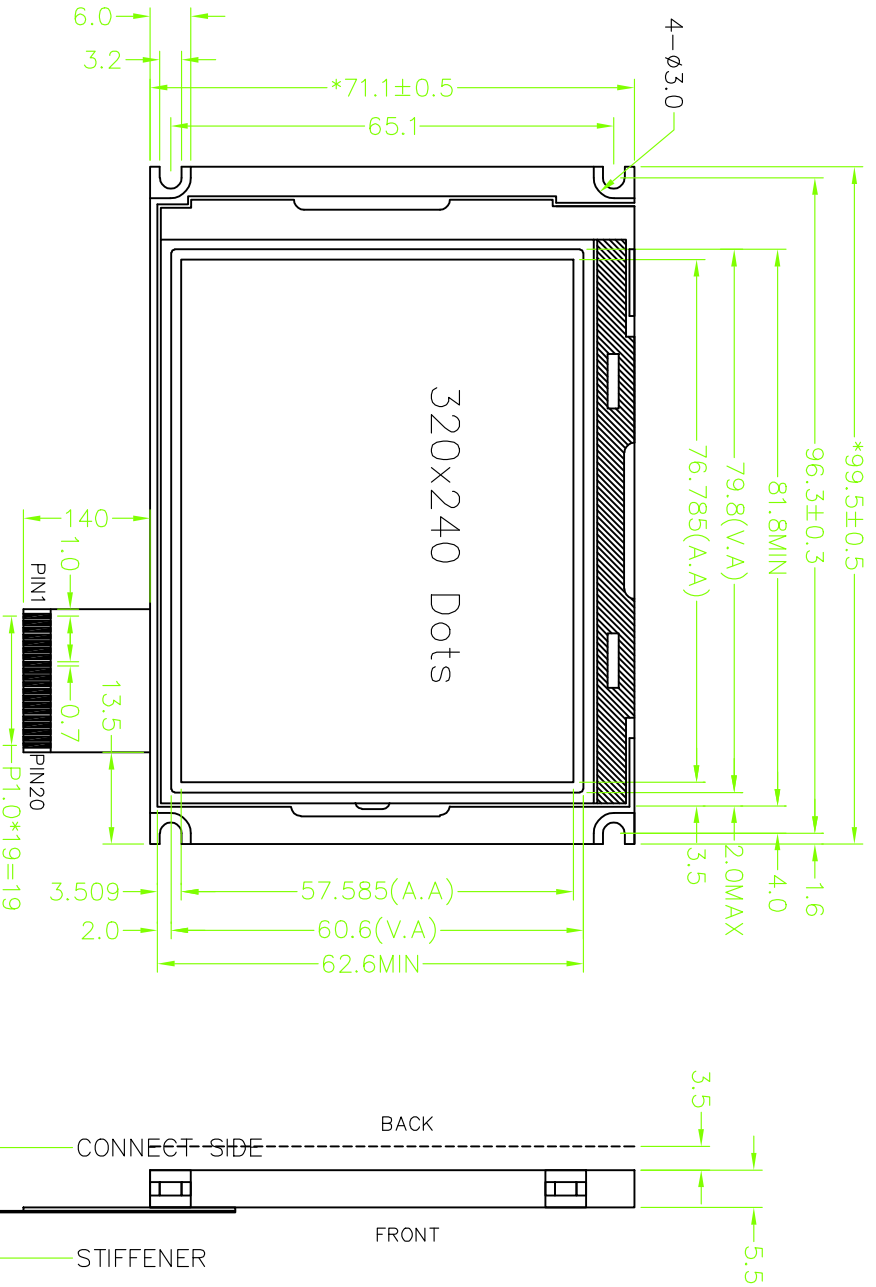

COM&SEG layout

C1	S1	---	S160	S161	---	S320
C160						
COM161						
COM240						

SPECIFICATION:

- 1). Driving: Duty:1/240, Bias:1/12, VDD:5.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode:STN/Negative/Transmissive/Blue
- 4). Operating temp.: -10°C~+60°C
- 5). Storage temp.: -20°C~+70°C
- 6). Control IC: SID13700
- 7). BACKLIGHT Color: White
- 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "(") ARE REFERENCED
- 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.	SYMBOL	PIN
A0	First issue	11-20	SYG320240L3V10-5C15BLNR8-B5NZF	VSS	1
				VDD	2
				VO	3
				/WR	4
				/RD	5
				/CS	6
				A0	7
				/RST	8
				DB0 ~ DB7	9 ~ 16
				/WAIT	17
				VOUT	18
				BLA	19
				BLK	20

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd



GENERAL TOL: ± 0.3

APPROVED BY	CHECKED BY	DRAWING BY	PAGE? 1 OF 1	UNIT: mm
			PROJECTION	