



Customer approval :

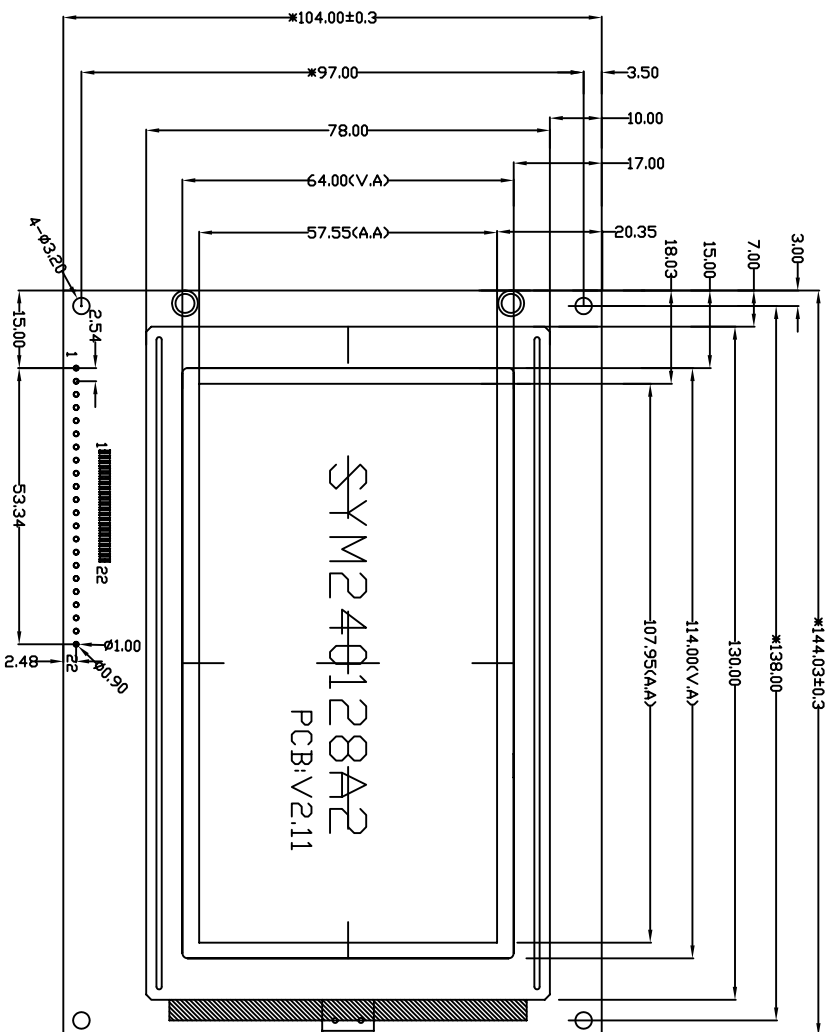

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:-1.3.5V(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Positive/Transflective/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: T6963C
- 6). Backlight: Bottom ,YG
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

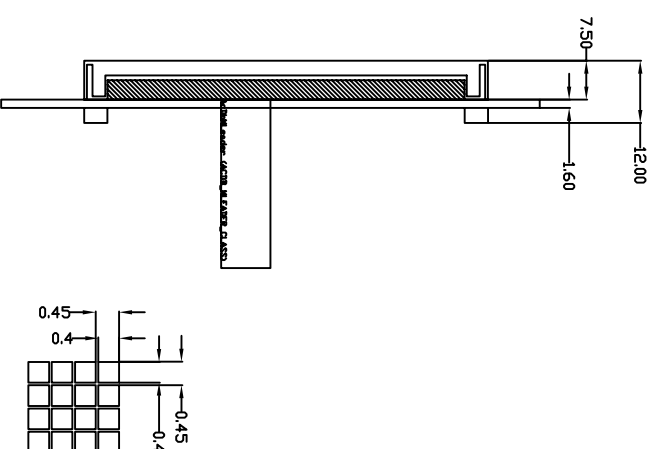

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	FG	GND	VDD	V0	WR	RO	CE	C/D	RES	DB0	DB1
PIN	12	13	14	15	16	17	18	19	20	21	22
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	FS	VOUT	BLA	BLK	NC

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd	
A0	First Issue	11/02	MODEL NO. 模组型号	SYM240128A2V211
			APPROVED BY	CHECKED BY
			DRAWING BY	PAGE: 1 OF 1
				GENERAL TOL: ±0.3
				未注公差
				UNIT: mm
				PROJECTION 三角法
				