


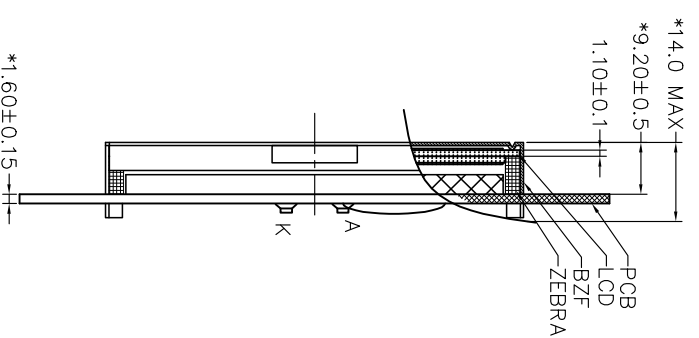


Customer approval :

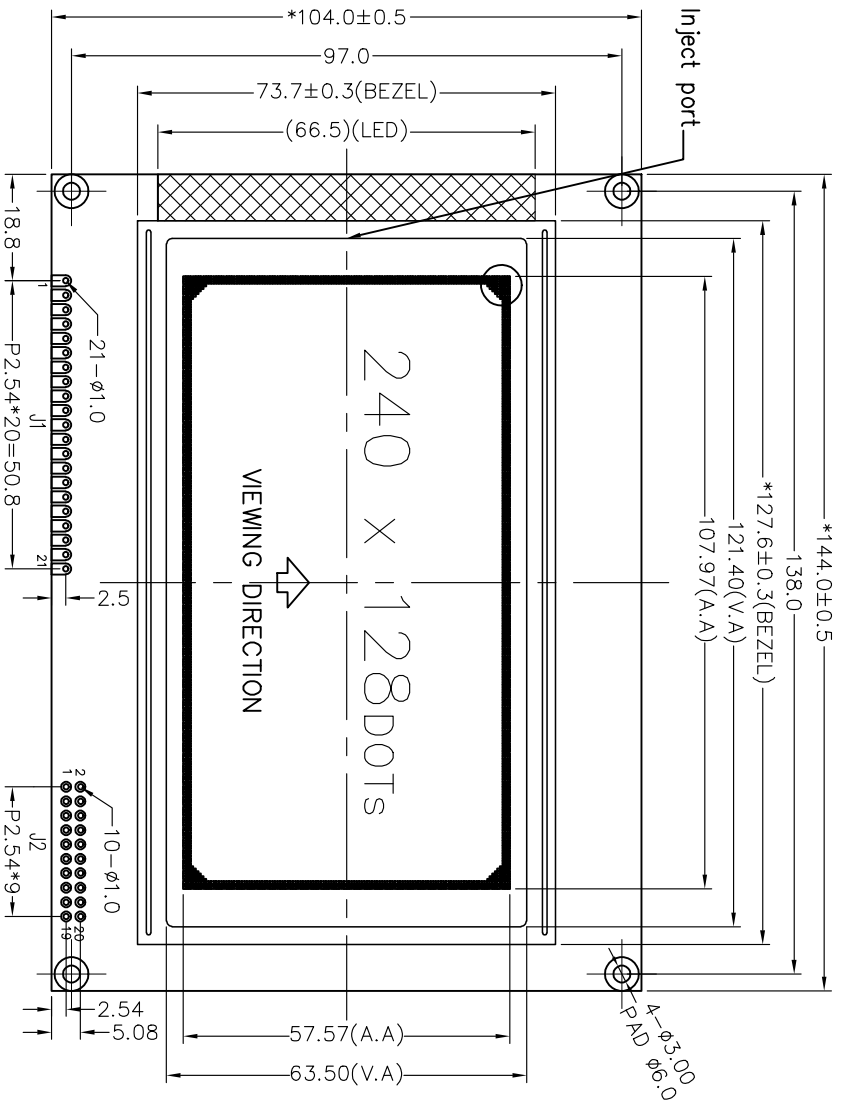

DOTS SIZE  
SCALE 20:1



PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	V0	/WR	/RD	/CE	C/D	/RES	DB0
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	BLA	BLK
									BLK	NC
									BLK	NC
									BLK	NC
									BLK	NC
									BLK	NC
									BLK	NC
									BLK	NC

VOUT	BLA	BLK	BLK
VOUT	BLA	BLK	NC
VOUT	BLA	BLK	NC
VOUT	BLA	BLK	NC

SPECIFICATION:

- 1). Driving: Duty: 1/240, Bias: 1/12, VLCD: 14.5V(Ref.), VDD: 5.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 3). Operating temp.: 0°C~+50°C
- 4). Storage temp.: -10°C~+60°C
- 5). Control IC: T6963C(LC7981)
- 6). BACKLIGHT Type: Edge, White
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT WITH MARK "(") ARE REFERENCED
- 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE
A0	First issue	2/27


**深圳市三元晶科技有限公司**  
 ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	GENERAL TOL: ± 0.3
模组型号	Liu	Francis	Luoxian	未注公差
SYM240128EV11-5CS5BLN7R-B5WG	2012/02/27	2012/02/27	2012/02/27	PAGE: 1 OF 1
				UNIT: mm
				PROJECTION 三角法