


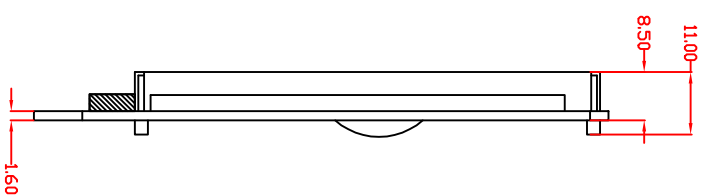


Customer approval :

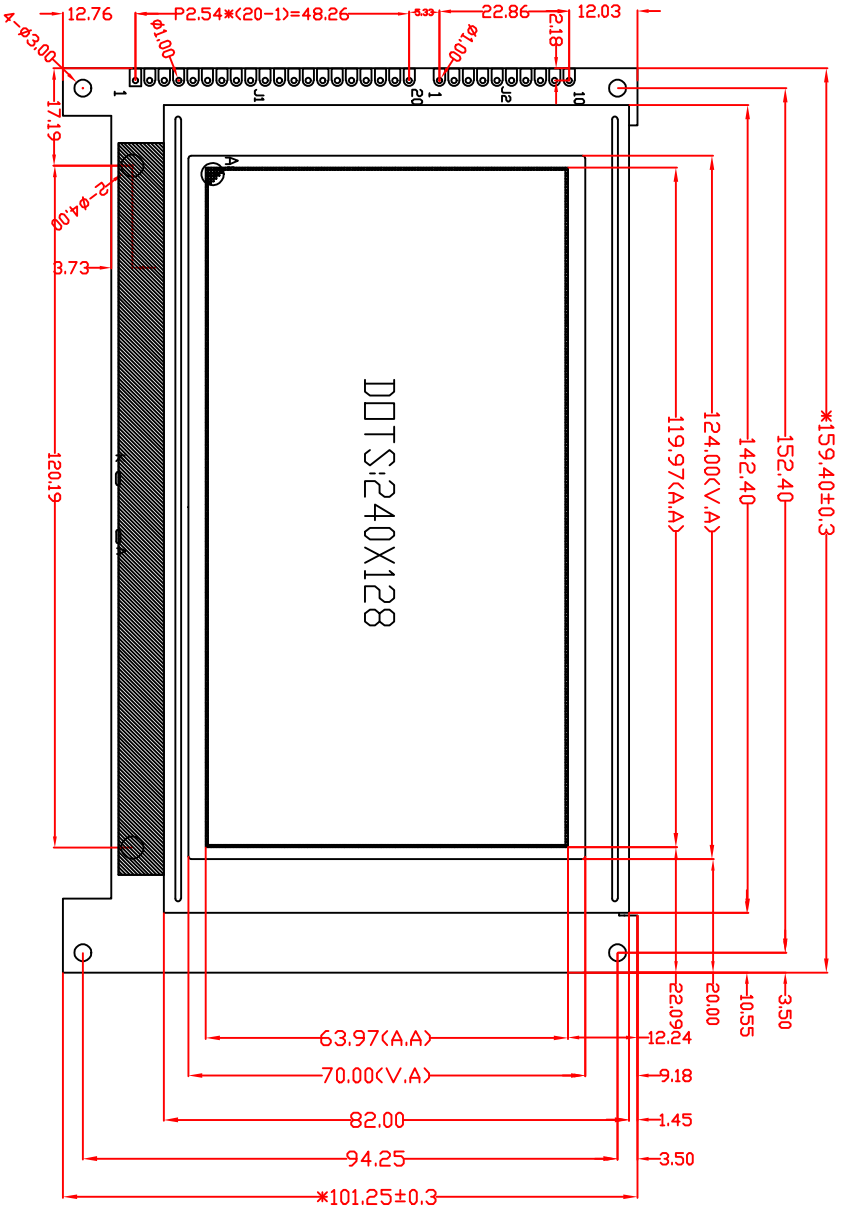

SPECIFICATION:

- 1). Driving: DotS: 240*128, DUTY: 1/128, BIAS: 1/9, VDD: 5.0V, VOUT: -14.5V, VO: -12.4V
- 2). Viewing angle: 6 O'CLOCK
- 3). Display mode: STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
Storage temp: -20°C~+60°C
- 4). Operating temp: 0°C~+50°C
- 5). Controller IC: T6963/LC7981(Or Compatible)
- 6). Backlight: White
- 7). Dimensions with mark "*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliçant

J1:

CONNECTION	ED	FLW	DISP	LP	CP	NC	VDD	GND	VOUT	VO										
PIN	1	2	3	4	5	6	7	8	9	10										
CONNECTION	GND	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	CS	RST	VOUT	DISP	BLA	BLK

J2:

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	ED	FLW	DISP	LP	CP	NC	VDD	GND	VOUT	VO

REVISION RECORD

REV	REV
AO	First issue



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

DRAWING NO. SYM240128HV21-5C4BLR-BSW

APPROVED BY CHECKED BY DRAWING BY UNIT: mm PAGE

Liu Francis Luoxian 2012/02/27 2012/02/27 2012/02/27

GENERAL TOL: ± 0.3