


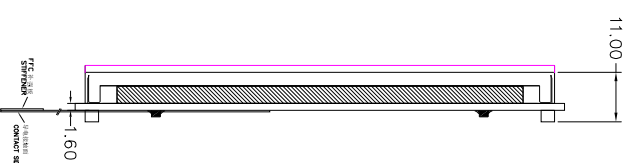


Customer approval :

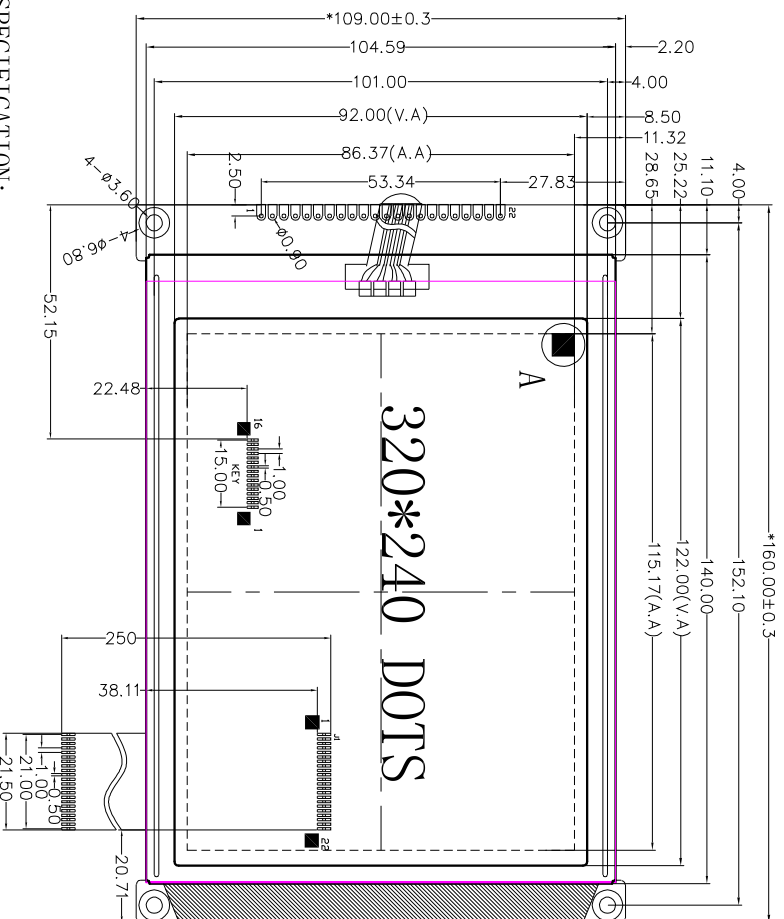

**SPECIFICATION:**

- 1). Driving: Duty:1/240, Bias:1/17, VOUT:-21.5V, V0:-18.5V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20° C~+70° C  
Storage temp.: -30° C~+80° C
- 5). Control IC: RA8806 or RA8803
- 6). BACKLIGHT Type: White 5V 160ma
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT  
WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

接口选择使用, FPC选择使用, T选择使用

J1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
	GND	VCC	V0	C/D	/MR	/RD	/CS1	CS2	BUSY	INT	/RES	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	BLK
J2	GND	VDD	V0	C/D	/MR	/RD	/CS1	CS2	BUSY	INT	/RES	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	BLK
KEY	KC0	KC1	KC2	KC3	KC4	KC5	KC6	KC7	KR0	KR1	KR2	KR3	KR4	KR5	KR6	KR7						

REV	REVISION	RECORD	DATE
A0	First issue		03/15



深圳市三元晶科技有限公司  
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	SYM320240BZK V20	GENERAL TOL: ±0.3
APPROVED BY		UNIT: mm
CHECKED BY		PAGE 1 OF 3
DRAWING BY	LAN	PROJECTION 三
		角